

1X4 Magnet Optical Switch

Product Description

The M1x4 optical switch is connected to the optical path by connecting or blocking the optical signal. the switch has non-mechanical configurations and activated via an electrical control signal. the switch also has build-in circulator and isolator functions. Products are widely used in aerospace and military equipment.

Features

- 1.Solid-state high speed
- 2.High Stability, High Reliability
- 3.Epoxy-free on Optical Path
- 4.Fail-safe latching


Applications

- 1.Configurable Add/Drop
- 2.System monitoring
- 3.Sensing system

Performance Specifications

Parameters	Unit	Specifications
Wavelength Range	nm	1520 ~ 1580
Test Wavelength	nm	1550
Insertion Loss 1, 2	dB	≤ 1.2
TDL	dB	≤ 0.30
PDL	dB	≤ 0.20
Return Loss	dB	≥ 50
Crosstalk	dB	≥ 40
Repeatability	dB	≤ ±0.01
Switching Time	us	≤ 100
Pulse Duration	us	≥ 200
Durability	Cycles	≥10 Billions
Switch Type	NA	Latching
Operating Current	mA	≤ 200
Maximum Optical Power	mW	≤ 500
Operating Temperature	°C	-5 ~ +70
Storage Temperature	°C	-40 ~ +85
Dimension	mm	(L)40×(W)14×(H)7.5 ±0.2
Note: 1 Test at room temperature and SOP. 2 Excluding connectors, 0.2dB for one pair connectors.		


Mechanical Dimensions (Unit: mm)

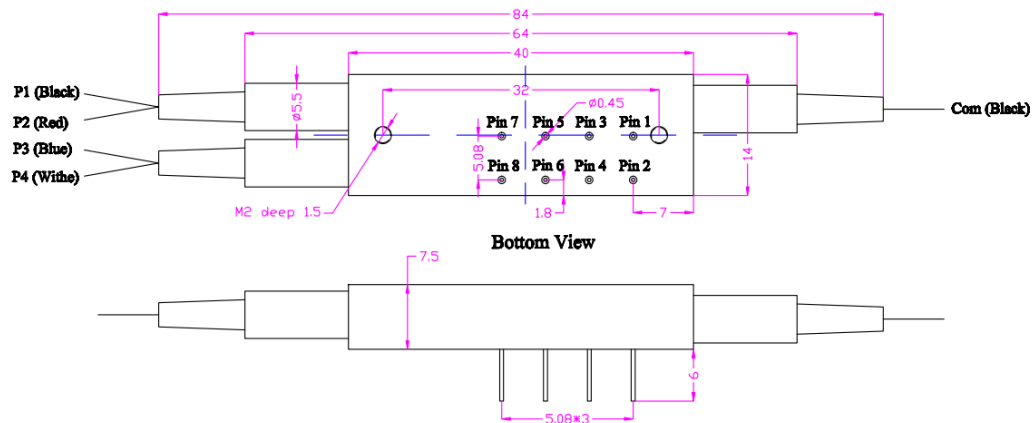

Electrical Drive

Type	Status	Optical Route	Electric Drive							
			Pin Group A		Pin Group B		Pin Group C		Pin Group D	
			Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
M1x4	I	Com—P1	V+	GND	V+	GND	V+	GND	GND	V+
	II	Com—P2	GND	V+	GND	V+	V+	GND	GND	V+
	III	Com—P3	V+	GND	GND	V+	GND	V+	V+	GND
	IV	Com—P4	GND	V+	V+	GND	GND	V+	V+	GND

Functional Diagram

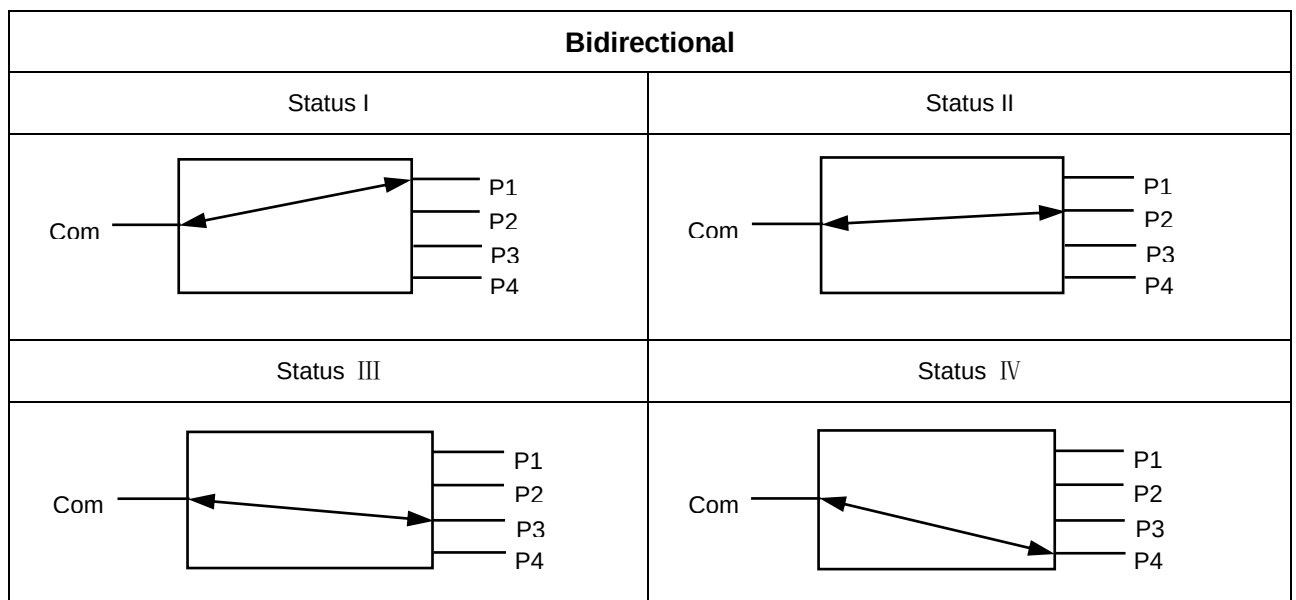

Ordering Information

M1x4-□-□-□-□-□-□-□

—□	—□	—□	—□	—□	—□	—□
Switch Type	Fiber Type	Voltage	Wavelength	Tube Type	Fiber Length	Connector
B:	SM:	2.5:	1550:	250:	05:	OO: None
Bidirectional	SM, 9/125	2.5V	1550nm	250um	0.5m±5cm	FC: FC/PC
	X:	X:	X:	900:	10:	FA: FC/APC
	Others	Others	Others	900um	1.0m±5cm	SC: SC/PC
				X:	X:	SA: SC/APC
				Others	Others	LC: LC/PC
						X: Others